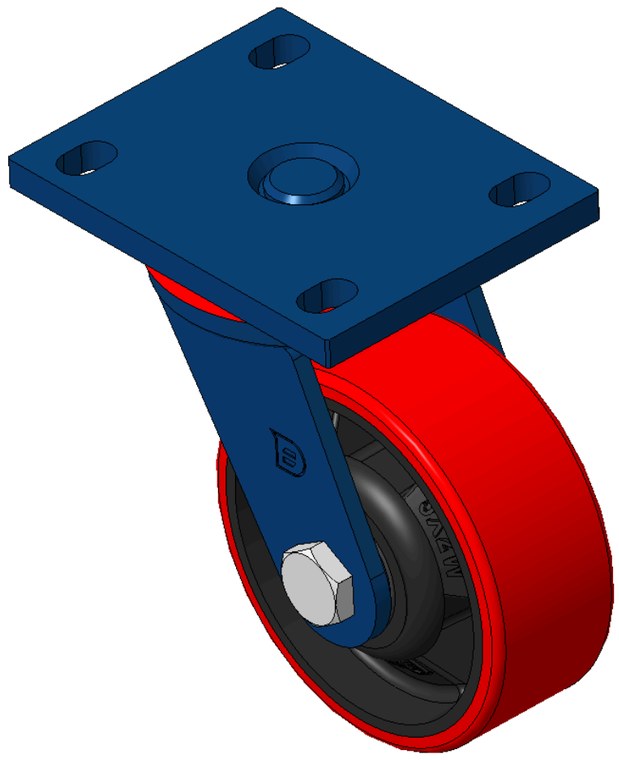




Picture may differ from original product

1102 B Type Caster Series

# WPU (red flat) Wheel Diameter x Wheel Width 125 x 49mm

KS-11020500332221 Copy model no.

| Wheel Diameter | Load Capacity (Dynamic) | Overall Height | Wheel Bearing |
|---|---|---|---|
| 125mm | 200kgs | 170mm | Wheels With Ball Bearings |

- Modible Casters, Welded Caster Fork
- Blue painted finish, Mounting Type - Top Plate, 105x77.5mm Bolt Hole Spacing
- Cast Iron Wheel Center, High-Quality, high-elasticity rubber rim
- Bearings—Ball Bearings, capless
- Wheel surface: Made of high-quality, high-elasticity rubber
- Wheel Center: Iron core/Cast iron core

Product descriptions are for reference only. The actual product shall prevail.

Product Data Sheet | 3D Drawing Request

3D drawings are for members only. Please log in to download.

## Product Data Sheet

Metric | Imperial

| | | | |
|---|---|---|---|
| Wheel Diameter | 125mm | Wheel Width | 49mm |
| Wheel Bearing | Wheels With Ball Bearings | Plate Size | 140 x 110mm |
| Bolt Hole Spacing | 105 x 77.5mm | Plate Hole | 20 x 13mm |
| Offset | 42mm | Swivel Interference | 215mm |
| Overall Height | 170mm | Swivel Radius | 107.5mm |
| Hardness Of Tread | 92±5° Shore A | Load Capacity (Dynamic) | 200kgs |
| Load Capacity (Static) | 300kgs | Temperature | -20°C to +70°C |
| Fork Type | Swivel Caster | Stainless | N/A |
| Electrical Conductivity | N/A | Anti-Static | N/A |
| Weight | 2.75kgs | Standard | ISO22883 |

* For any deviation between metric and imperial spec, please refer to the metric spec.

## Performance

**Rolling Smoothness**
Max. 5 points Score: 3

**Quiet Operation**
Max. 5 points Score: 4


**Floor Surface Preservation**
Max. 5 points Score: 4

## Downloads

PDF **1102-EN-KS2026112312.pdf**
Product Data Sheet

3D **1102-CN-KS2026112312-d261123152939.rar**
3D drawings are for members only. Please log in to download.

## Related Products

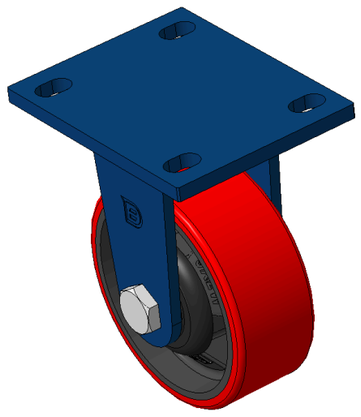

1102 B Type Caster Series

**WPU (red flat) Wheel Diameter x Wheel Width 125 x 49mm**

KS-11020500331221

| wheel diameter | dynamic load | overall height |
|---|---|---|
| 125 mm | 300 kg | 170 mm |

View specs →