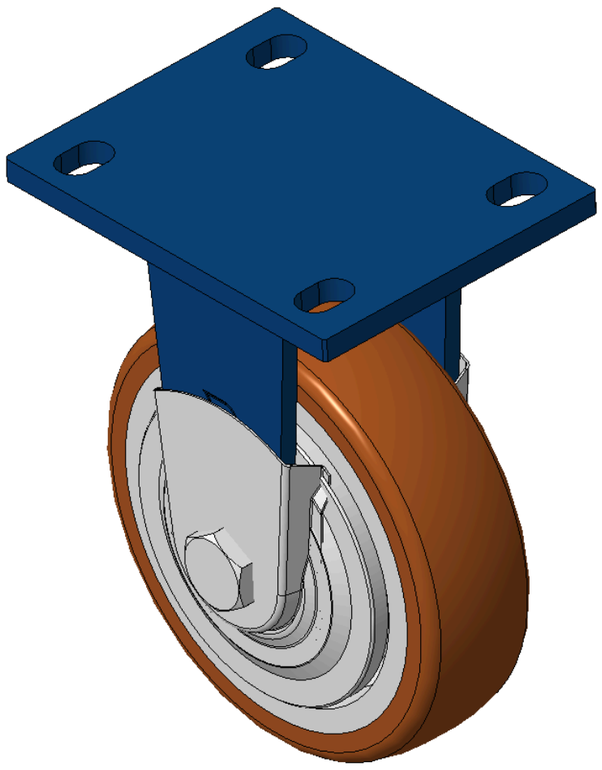




Picture may differ from original product

1102 B Type Caster Series

# QPU (Brown round) Wheel Diameter × Wheel Width 150 x 42mm

KS-11020600531131 Copy model no.

| Wheel Diameter | Load Capacity (Dynamic) | Overall Height | Wheel Bearing |
|---|---|---|---|
| 150mm | 335kgs | 197mm | Wheels With Ball Bearings |

- Rigid Casters, Welded Caster Fork—105x77.5mm Bolt Hole Spacing
- Blue painted finish, Mounting Type - Top Plate device
- Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread
- Bearings—Ball Bearings, equipped with special anti-winding wheel covers
- Wheel Tread: Hhigh-Quality Polyurethane
- Wheel Center: Iron core/Cast iron core

Product descriptions are for reference only. The actual product shall prevail.

3D Drawing Request

3D drawings are for members only. Please log in to download.

## Product Data Sheet

Metric | Imperial

| | | | |
|---|---|---|---|
| Wheel Diameter | 150mm | Wheel Width | 42mm |
| Wheel Bearing | Wheels With Ball Bearings | Plate Size | 140 x 110mm |
| Bolt Hole Spacing | 105 x 77.5mm | Plate Hole | 20 x 13mm |
| Overall Height | 197mm | Hardness Of Tread | 92±5° Shore A |
| Load Capacity (Dynamic) | 335kgs | Load Capacity (Static) | 502.5kgs |
| Temperature | -20°C to +70°C | Fork Type | Rigid Caster |
| Stainless | N/A | Electrical Conductivity | N/A |
| Anti-Static | N/A | Weight | 2.01kgs |
| Standard | ISO22883 | | |

* For any deviation between metric and imperial spec, please refer to the metric spec.

## Performance

**Rolling Smoothness**
Max. 5 points Score: 5


**Quiet Operation**
Max. 5 points Score: 5

**Floor Surface Preservation**
Max. 5 points Score: 5

## Downloads

3D **1102-CN-KS2026112406-d261124140627.rar**
3D drawings are for members only. Please log in to download. ›

## Related Products

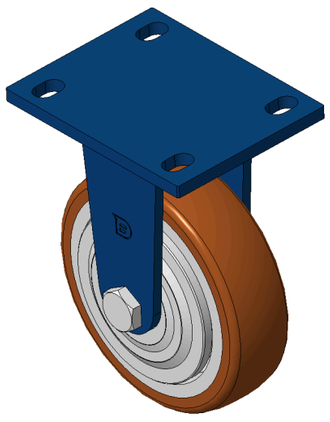

1102 B Type Caster Series

**QPU (Brown round) Wheel Diameter × Wheel Width 150 x 42mm**

KS-11020600531121

| wheel diameter | dynamic load | overall height |
|---|---|---|
| 150 mm | 335 kg | 197 mm |

View specs →