



Picture may differ from original product

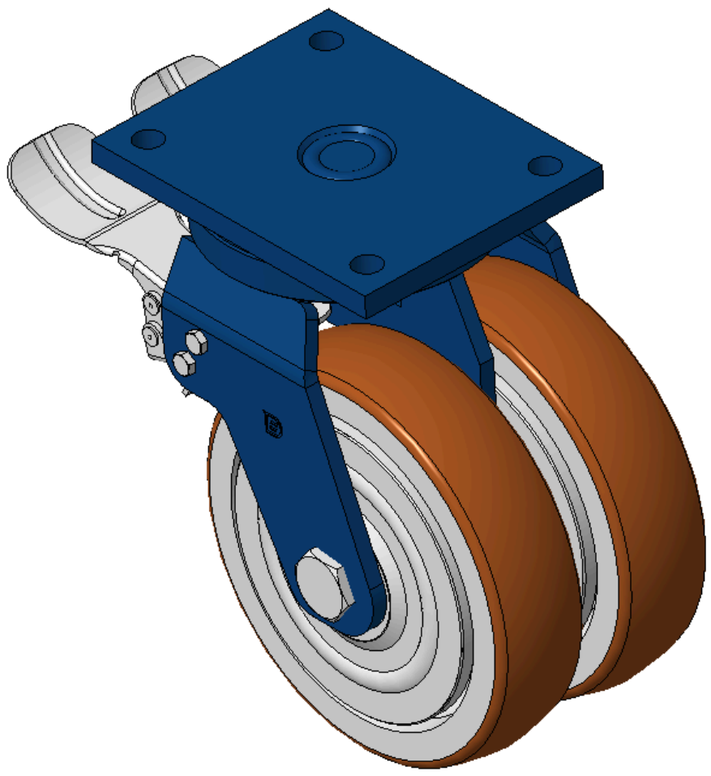



1152 Anti-Friction Caster (B Type) Series

VQPU (brown round) Wheel Diameter x Wheel Width 200 x 50mm

KS-11520800544341 Copy model no.

Wheel Diameter	Load Capacity (Dynamic)	Overall Height	Wheel Bearing
200mm	1440kgs	260mm	Wheels With Ball Bearings

- With rear brake，Caster with locking system，Welded steel plate bracket，Blue-painted finish
- Top plate mounting，Hole spacing 140x105
- Cast iron wheel core，High-quality polyurethane tread，Brown
- Wheel bearing—Precision ball bearing
- Tread：High-quality polyurethane
- Wheel core：Iron/cast iron core

Product descriptions are for reference only. The actual product shall prevail.

Product Data Sheet (Metric) | 3D Drawing Request

3D drawings are for members only. Please log in to download.

Product Data Sheet

Metric | Imperial

Wheel Diameter	200mm	Wheel Width	50mm
Wheel Bearing	Wheels With Ball Bearings	Plate Size	175 x 140mm
Bolt Hole Spacing	140x105mm	Plate Hole	15mm
Offset	60mm	Swivel Interference	344mm
Overall Height	260mm	Swivel Radius	172mm
Hardness Of Tread	92±5° Shore A	Load Capacity (Dynamic)	1440kgs
Load Capacity (Static)	2160kgs	Temperature	-20°C to +70°C
Fork Type	Swivel Caster With Rear Brake	Stainless	N/A
Electrical Conductivity	N/A	Anti-Static	N/A
Weight	16.62kgs	Standard	ISO22883

* For any deviation between metric and imperial spec, please refer to the metric spec.

Performance

Rolling Smoothness
Max. 5 points Score: 5

Quiet Operation
Max. 5 points Score: 5


Floor Surface Preservation
Max. 5 points Score: 5

Downloads

PDF **KS-115208005443413.pdf**
Product Data Sheet (Metric)

3D **KS-11520800544341.zip**
3D drawings are for members only. Please log in to download.

Related Products

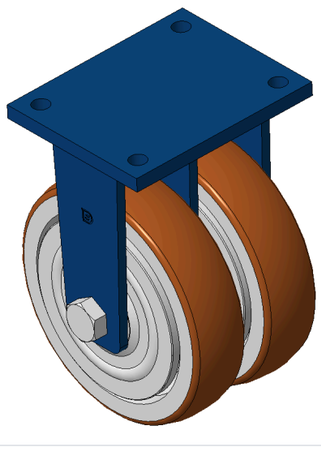


1152 Anti-Friction Caster (B Type) Series

VQPU (brown round) Wheel Diameter x Wheel Width 200 x…

KS-11520800541341

wheel diameter	dynamic load	overall height
200 mm	1440 kg	260 mm

View specs →

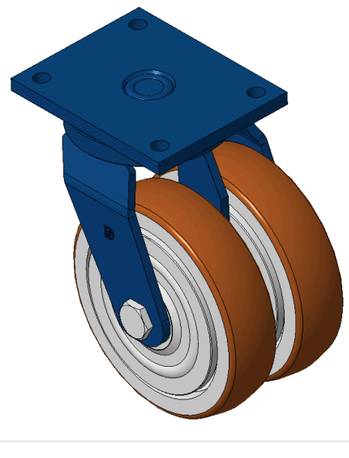

1152 Anti-Friction Caster (B Type) Series

VQPU (brown round) Wheel Diameter x Wheel Width 200 x…

KS-11520800542341

wheel diameter	dynamic load	overall height
200 mm	1440 kg	260 mm

View specs →