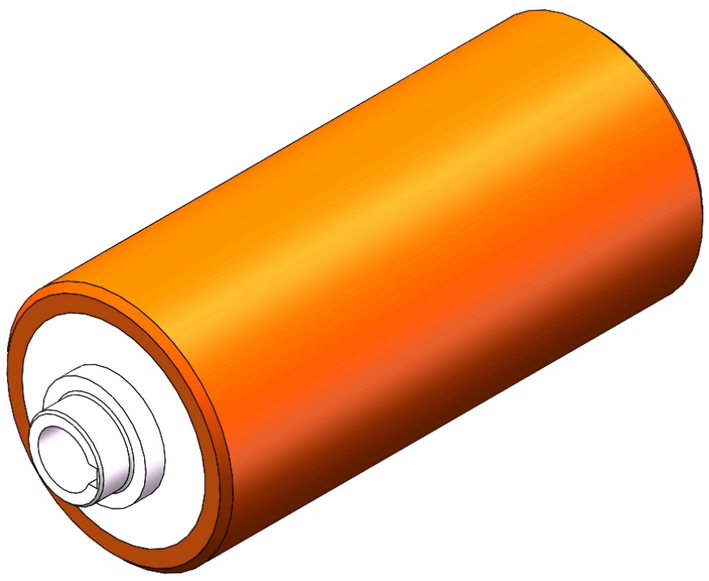

Picture may differ from original product




HPU Series

Wheel Diameter × Wheel Width 105 x 224mm

YJ-12037704880103 Copy model no.

Wheel Diameter（D）	Tread Pattern	Load Capacity at 6 km/h
105mm	—	**127.5kgs**

- Excellent mechanical properties and abrasion resistance
- Excellent chemical resistance、Resistance to corrosive substances
- Suitable for forklifts、Electric stackers、AGV automation and floor-scrubber applications
- HPU，Fluorescent orange，Machined random-pattern surface
- Increases floor traction，Effectively improves slip resistance
- Inner bushing：Iron core

Product descriptions are for reference only. The actual product shall prevail.

Product Data Sheet

Metric | Imperial

Wheel Diameter（D）	**105mm**	Wheel Width（T2）	**224mm**
Wheel installation — Hub Lenth (T1)	—	Wheel Mounting Bore Diameter	**24.1 mm**
Keyway Width	**8mm**	Wheel Keyway Depth (H)	**27.3mm**
Load Capacity (Static)	**225kgs**	Load Capacity at 4 km/h	**150kgs**
Load Capacity at 6 km/h	**127.5kgs**	Load Capacity at 10 km/h	**105kgs**
Load Capacity at 16 km/h	**60kgs**	Hardness Of Tread	**92±5° Shore A**
Temperature	**-20°C to +70°C**	Tread Pattern	—
Wheel centre/ rim		Non-Marking	**Y**
Conductive	**N/A**	Anti	**N/A**
Weight	**2.50kgs**	Standard	**ISO22883**

* For any deviation between metric and imperial spec, please refer to the metric spec.

Performance

Rolling Smoothness
Max. 5 points Score: 5

Quiet Operation
Max. 5 points Score: 4

Floor Surface Preservation
Max. 5 points Score: 5

© 2026 DERSHENG CO., LTD. All rights reserved.