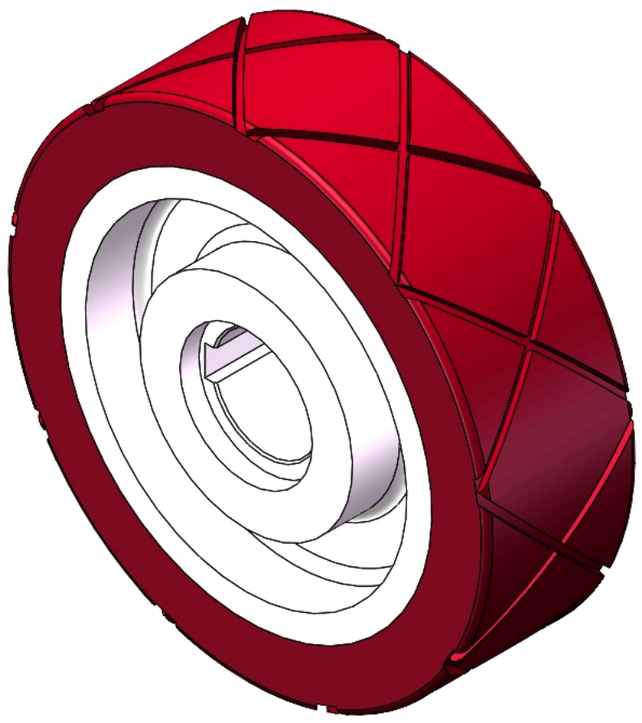

Picture may differ from original product




XPU Series

Wheel Diameter × Wheel Width 255 x 80mm

YJ-12036110330303 Copy model no.

Wheel Diameter（D）	Tread Pattern	Load Capacity at 6 km/h
255mm	—	**1360kgs**

- Excellent mechanical properties，Maintains high load capacity at high speeds，Good abrasion resistance，Resists deformation
- Excellent resistance to chemicals、Solvents and corrosive substances
- Suitable for forklifts、Electric stackers、Heavy machinery、AGVs and industrial automation
- XPU，Burgundy，Machined diamond-pattern surface
- Increases floor traction，Effectively improves slip resistance
- Inner bushing：Iron core

Product descriptions are for reference only. The actual product shall prevail.

Product Data Sheet

Metric | Imperial

Wheel Diameter（D）	**255mm**	Wheel Width（T2）	**80mm**
Wheel installation — Hub Lenth (T1)	—	Wheel Mounting Bore Diameter	**55mm**
Keyway Width	**16mm**	Wheel Keyway Depth (H)	**59.3mm**
Load Capacity (Static)	**2400kgs**	Load Capacity at 4 km/h	**1600kgs**
Load Capacity at 6 km/h	**1360kgs**	Load Capacity at 10 km/h	**1120kgs**
Load Capacity at 16 km/h	**640kgs**	Hardness Of Tread	**92±5° Shore A**
Temperature	**-20°C to +70°C**	Tread Pattern	—
Wheel centre/ rim		Non-Marking	**Y**
Conductive	**N/A**	Anti	**N/A**
Weight	**13.32kgs**	Standard	**ISO22883**

* For any deviation between metric and imperial spec, please refer to the metric spec.

Performance

Rolling Smoothness
Max. 5 points Score: 3

Quiet Operation
Max. 5 points Score: 4

Floor Surface Preservation
Max. 5 points Score: 4

© 2026 DERSHENG CO., LTD. All rights reserved.