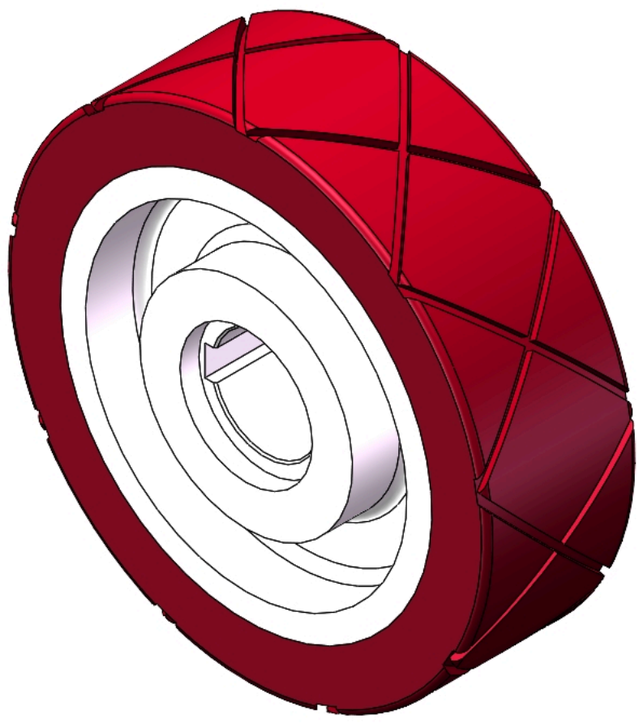

Picture may differ from original product




XPU Series

Wheel Diameter × Wheel Width 255 x 80mm

YJ-12036110330303 Copy model no.

Wheel Diameter（D）	Tread Pattern	Load Capacity at 6 km/h
6 "	菱形纹	2998lbs

- Excellent mechanical properties，Maintains high load capacity at high speeds，Good abrasion resistance，Resists deformation
- Excellent resistance to chemicals、Solvents and corrosive substances
- Suitable for forklifts、Electric stackers、Heavy machinery、AGVs and industrial automation
- XPU，Burgundy，Machined diamond-pattern surface
- Increases floor traction，Effectively improves slip resistance
- Inner bushing：Iron core

Product descriptions are for reference only. The actual product shall prevail.

Product Data Sheet

Metric | Imperial

Wheel Diameter（D）	6 "	Wheel Width（T2）	1-5/8 "
Wheel installation — Hub Lenth (T1)	—	Wheel Mounting Bore Diameter	2-3/16 "
Keyway Width	11/16 "	Wheel Keyway Depth (H)	59.3
Load Capacity (Static)	5291lbs	Load Capacity at 4 km/h	3527lbs
Load Capacity at 6 km/h	2998lbs	Load Capacity at 10 km/h	2469lbs
Load Capacity at 16 km/h	1411lbs	Hardness Of Tread	92±5° Shore A
Temperature	-4°F to +158°F	Tread Pattern	菱形纹
Wheel centre/ rim		Non-Marking	Y
Conductive	N/A	Anti	N/A
Weight	29.4lbs	Standard	ISO22883

* For any deviation between metric and imperial spec, please refer to the metric spec.

Performance

Rolling Smoothness
Max. 5 points Score: 3

Quiet Operation
Max. 5 points Score: 4

Floor Surface Preservation
Max. 5 points Score: 4

© 2026 DERSHENG CO., LTD. All rights reserved.