
Product Data Sheet

1141 Kingpinless Caster Series

CPD Wheel Diameter x Wheel Width 125 x 40mm

EAN

KS-11410500292023

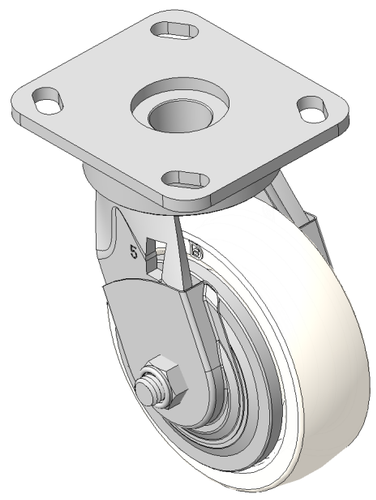

Picture may differ from original product

Portable Casters, Welded Caster Fork
Zine-Plated surface, Mounting Type - Top Plate device, 85x70mm Bolt Hole Spacing
Polypropylene Wheel Center and rim, natural finish
Bearings—Ball Bearings, equipped with specially designed anti-winding wheel covers

Wheel surface: PP polypropylene
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

Technical Data


◉ Metric ○ Imperial

Wheel Diameter	125mm
Wheel Width	40mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	29mm
Swivel Interference	191mm
Overall Height	166.5mm
Swivel Radius	95.5mm
Hardness Of Tread	72±5° Shore D
Load Capacity (Dynamic)	250kgs
Load Capacity (Static)	375kgs
Temperature	-12°C to +60°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.96kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ○ ○
Floor Surface Preservation	● ● ● ○ ○

Dimensions

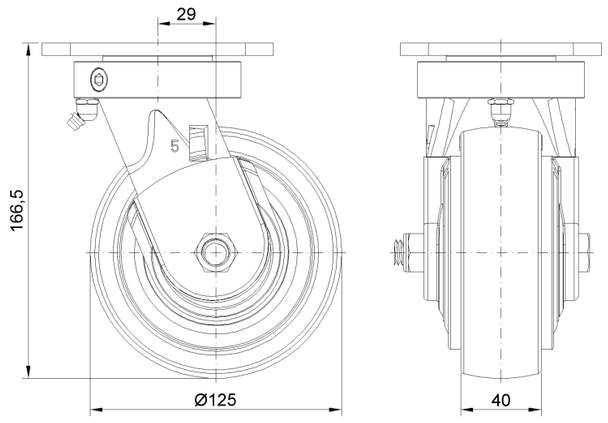

Mounting

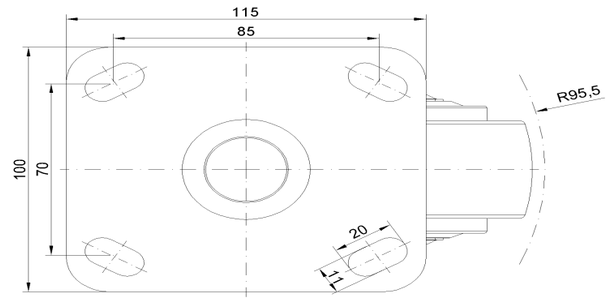

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com