
# 1163-1 Self-balancing Caster Series

## HPU Wheel (Brown-Orange), 125 x 50 mm

EAN

KS-11630503762311

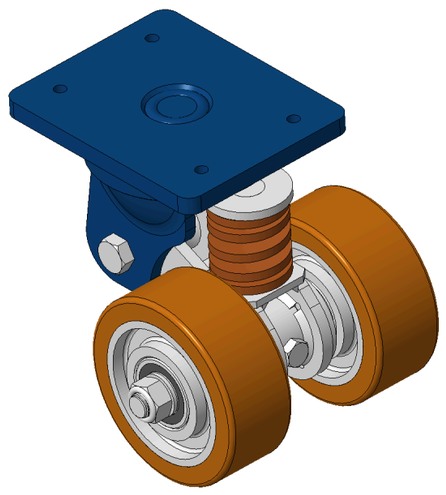

Removable Casters, Welded steel plate Fork, surface blue paint
Bottom plate installation device, Bolt Hole Spacing 125x75
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, brown orange yellow
Bearings - specially designed Ball Bearings to reduce Rolling Resistance
HPU dual wheel, equipped with the latest developed left-right balance structure
The addition of springs to the Fork has significant elasticity and Shock-Absorbing functions
HPU dual wheel, equipped with the latest developed left-right balance structure
The addition of springs to the Fork has significant elasticity and Shock-Absorbing functions

Drawings are for reference only and may differ from the product

Picture may differ from original product

### Technical Data


◉ Imperial ○ Metric

| | |
|---|---|
| Wheel Diameter | 5 " |
| Wheel Width | 2 " |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 6 1/2 " x 5 1/4 " |
| Bolt Hole Spacing | 5 " x3 " |
| Plate Hole | M10xP1.5 " |
| Offset | 2-13/16 " |
| Swivel Interference | 12-5/8 |
| Overall Height | 7-23/25 |
| Swivel Radius | 6-2/5 |
| Hardness Of Tread | 80±5° Shore A |
| Load Capacity (Dynamic) | 2000lbs |
| Load Capacity (Static) | 2999lbs |
| Temperature | -4°F to +158°F |
| Fork Type | Swivel Caster |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 26.9lbs |
| Standard | ISO22883 |


### Advantages at a glance

| | |
|---|---|
| Rolling Resistance | ●●●●● |
| Operating Noise | ●●●●○ |
| Floor Surface Preservation | ●●●●● |

### Dimensions

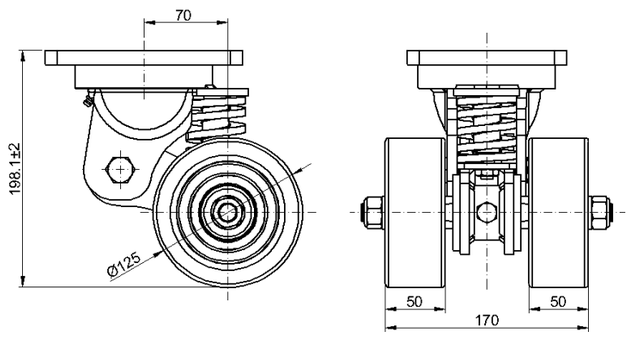


### Mounting

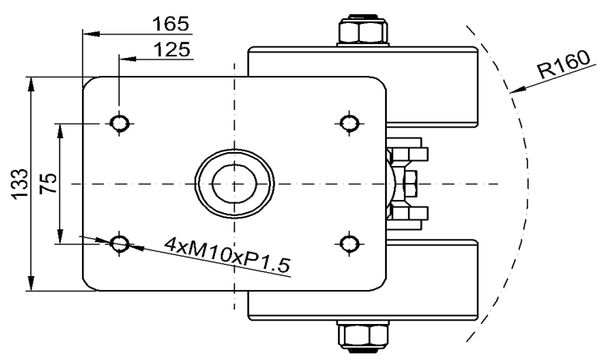


* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com