
Product Data Sheet

# 1112 2" Wide General Purposes Caster Series

W Resolute(gray) Wheel Diameter × Wheel Width 200 x 50mm

EAN

TW-4111208002032

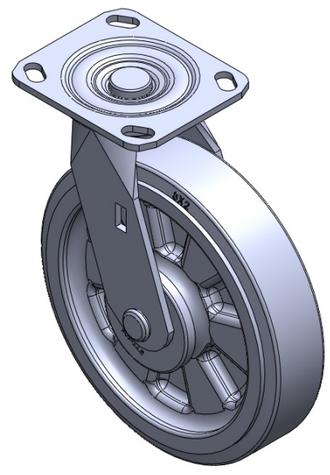

Picture may differ from original product

Portable Casters, Welded Caster Fork Electroplated surface, Mounting Type - Top Plate (with iron cover) Reinforced impact-resistant polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Gray, Bearing—Annual Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

## Technical Data


◉ Metric ○ Imperial

| | |
|---|---|
| Wheel Diameter | 200mm |
| Wheel Width | 50mm |
| Wheel Bearing | Wheel With Annual Ball Bearing |
| Plate Size | 115 x 100mm |
| Bolt Hole Spacing | 85 x 70mm |
| Plate Hole | 20 x 11mm |
| Offset | 45mm |
| Swivel Interference | 290mm |
| Overall Height | 240mm |
| Swivel Radius | 145mm |
| Hardness Of Tread | 72±5° Shore A |
| Load Capacity (Dynamic) | 306kgs |
| Load Capacity (Static) | 460kgs |
| Temperature | -20°C to +60°C |
| Fork Type | Swivel Caster |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 2.40kgs |
| Standard | ISO22883 |


## Advantages at a glance

| | |
|---|---|
| Rolling Resistance | ● ● ● ● ● |
| Operating Noise | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

## Dimensions

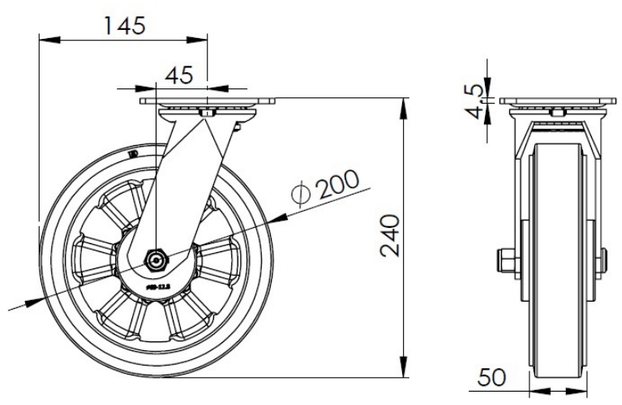


## Mounting

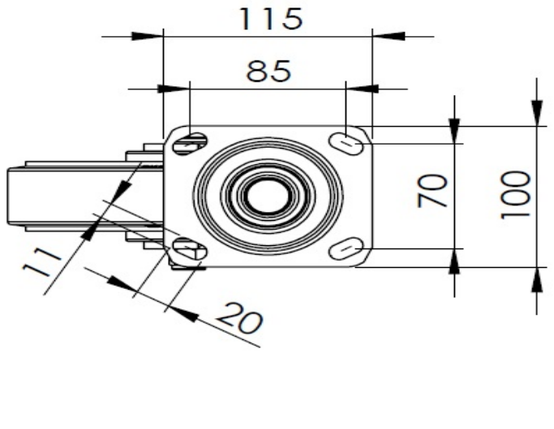


* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com