
Product Information Sheet

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series

Rubber Wheel Diameter × Wheel Width 75 x 31mm

EAN

TW-4111603004060

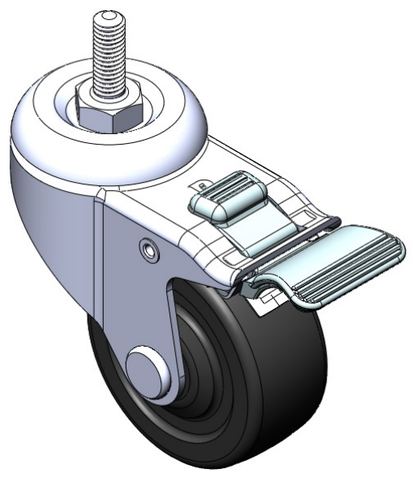

Picture may differ from original product

Equipped with double-brake With locking system Casters. Stamping feet with Riveted cores—3/8"-16 teeth. Surface vibration, Mounting Type - Top Plate. High-Quality Resilient Rubber Wheel Tread and core. Black, Plain Bearings.

Wheel surface: High-quality elastic rubber

Wheel Center: High-quality elastic rubber

Drawings are for reference only and may differ from the product

Technical Data


◉ Metric ○ Imperial

Wheel Diameter	75mm
Wheel Width	31mm
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	3/8 " -16牙
Threaded Length	28mm
Offset	41.5mm
Swivel Interference	212mm
Overall Height	109mm
Swivel Radius	106mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	70kgs
Load Capacity (Static)	105kgs
Temperature	-20°C to +120°C
Fork Type	Swivel Caster With Total Brake
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.65kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

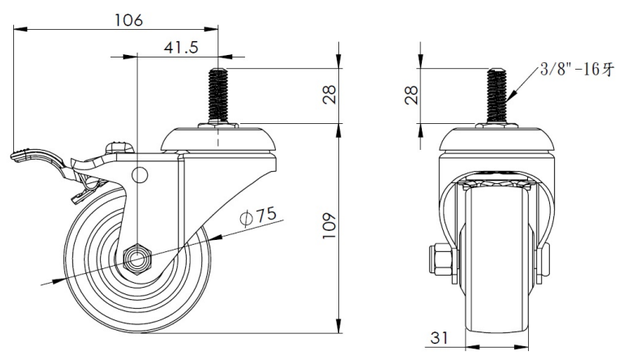

Mounting

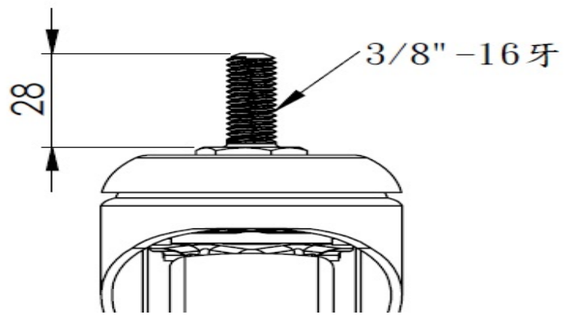

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com