Product Data Sheet

1150 Medium Duty General Purposes Caster Series

AQPU (grey round) Wheel Diameter × Wheel Width 100 x 40mm

A


YJ-11500400604013

Equipped with double-brake, locking Casters. Riveted and Stamping Top Plate legs – 44.5 x 30mm (1-3/4" x 1-1/8") Bolt Hole Spacings.
Zine-Plated surface, Top Plate (3T) Mounting Type device.
Aluminum core, High Quality Polyurethane Wheel Tread.
Gray, Bearing – Ball Bearings.

Wheel Tread: Hhigh-Quality Polyurethane

Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product

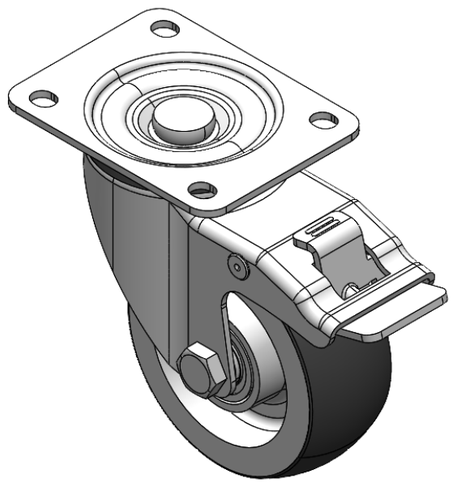

Picture may differ from original product

Technical Data


◉ Metric ○ Imperial

Wheel Diameter	100mm
Wheel Width	40mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	104 x 80mm
Bolt Hole Spacing	80 x 60mm
Plate Hole	10.5 x 9mm
Offset	38mm
Swivel Interference	224mm
Overall Height	128mm
Swivel Radius	112mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	350kgs
Load Capacity (Static)	525kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster With Total Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.23kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

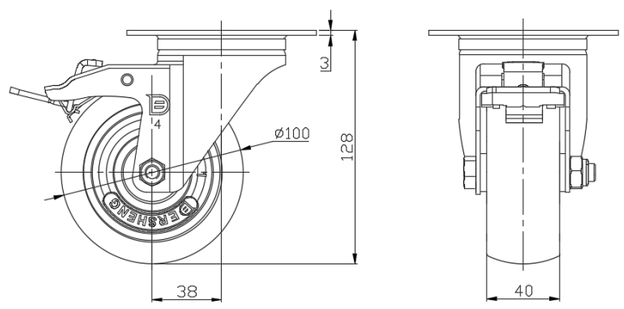

Mounting

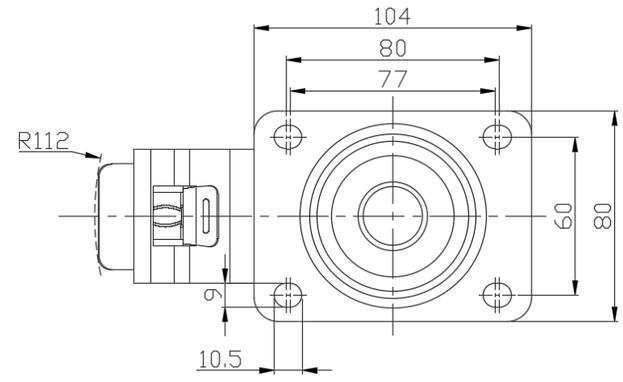

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com