
Product Data Sheet

1112 2" Wide General Purposes Caster Series

W Resolute Wheel Diameter × Wheel Width 152 x 50mm

EAN

TW-4111206002048

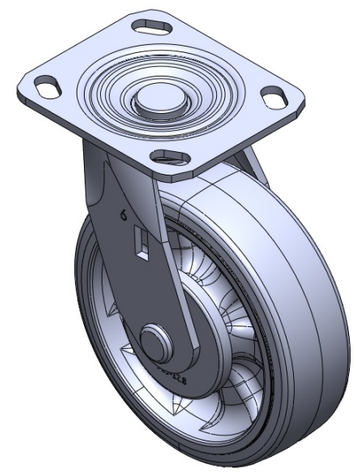

Picture may differ from original product

Swivel Caster with Welded Caster Fork E-Coat Finish, Mounting Type - Top Plate (with iron cover) Reinforced, impact-resistant High-quality Impact Resistance Polypropylene core with High-Quality Thermoplastic Rubber (TPR) tread Gray color, Bearing—precision long bead

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

Technical Data


◉ Metric ○ Imperial

Wheel Diameter	152mm
Wheel Width	50mm
Wheel Bearing	Wheel With Annual Ball Bearing
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	35mm
Swivel Interference	222mm
Overall Height	190mm
Swivel Radius	111mm
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	272kgs
Load Capacity (Static)	408kgs
Temperature	-20°C to +60°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.0kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

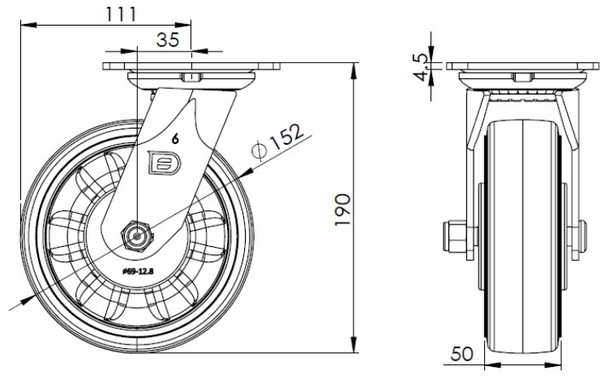

Mounting

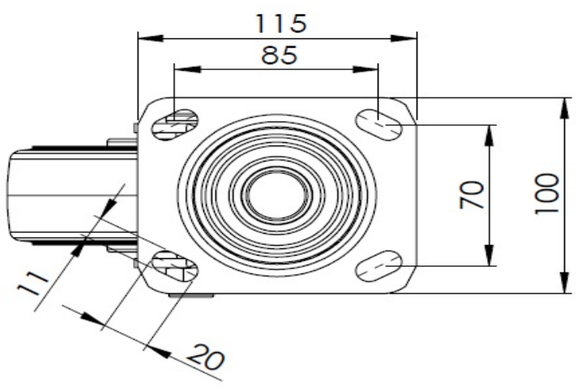

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com